




JOB NAME			PART NO.		
DESCRIPTION:			DRAWING NO.		REV
DRAWN BY:	APPROVED:	ECN:	SCALE:	DATE:	

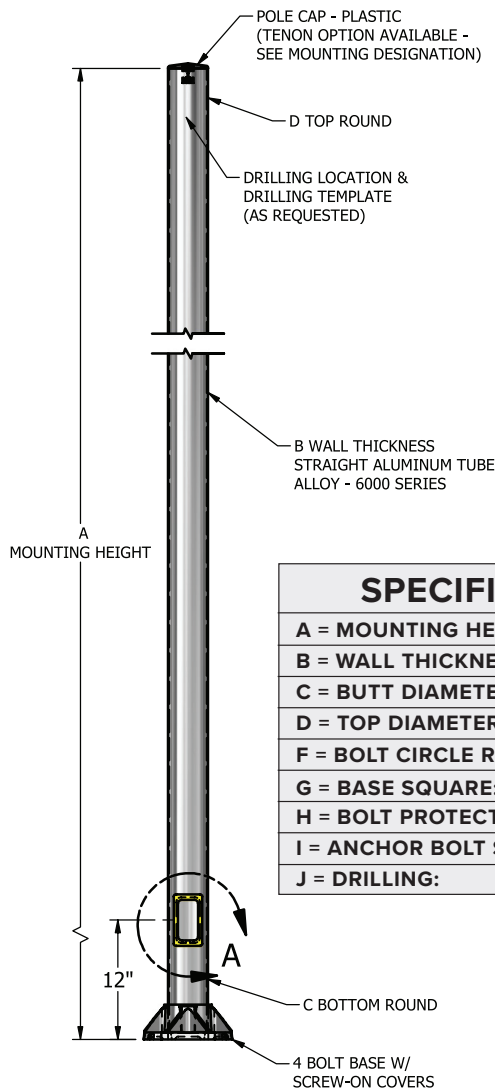


SPECIFICATIONS

A = MOUNTING HEIGHT:
B = WALL THICKNESS: .125
C = BUTT DIAMETER: 4"
D = TOP DIAMETER: 4"
F = BOLT CIRCLE RANGE: 6.5" - 9"
G = BASE SQUARE: 8.88"
H = BOLT PROTECTION: 3 1/4"
I = ANCHOR BOLT SIZE: 3/4" X 20" X 3"
J = DRILLING:


ANCHORAGE



FIXTURE




BASE



4 BOLT ANCHOR BASE
SCREW-IN BOLT COVERS

HANDHOLE



2013 AASHTO MAXIMUM EPA RATINGS WITH 3 SEC. WIND GUST

ALUMINUM ROUND STRAIGHT POLE RSA-4.0-0.125 SERIES

PART NUMBER	MAX WT LBS	90 MPH SQ FT	100 MPH SQ FT	110 MPH SQ FT	120 MPH SQ FT	130 MPH SQ FT	140 MPH SQ FT	150 MPH SQ FT
RSA 4 125 8	100	11.80	9.10	7.40	6.00	5.00	4.30	3.60
RSA 4 125 10	100	8.60	6.60	5.20	4.10	3.50	2.90	2.40
RSA 4 125 12	100	6.50	4.80	3.70	2.80	2.20	1.80	1.50
RSA 4 125 14	100	4.90	3.50	2.40	1.70	1.40	1.10	0.80
RSA 4 125 16	100	3.50	2.30	1.40	0.75	NA	NA	NA
RSA 4 125 18	150	2.50	1.40	0.60	NA	NA	NA	NA
RSA 4 125 20	150	1.60	0.60	NA	NA	NA	NA	NA