



JOB NAME			PART NO.		
DESCRIPTION:			DRAWING NO.		REV
DRAWN BY:	APPROVED:	ECN:	SCALE:	DATE:	

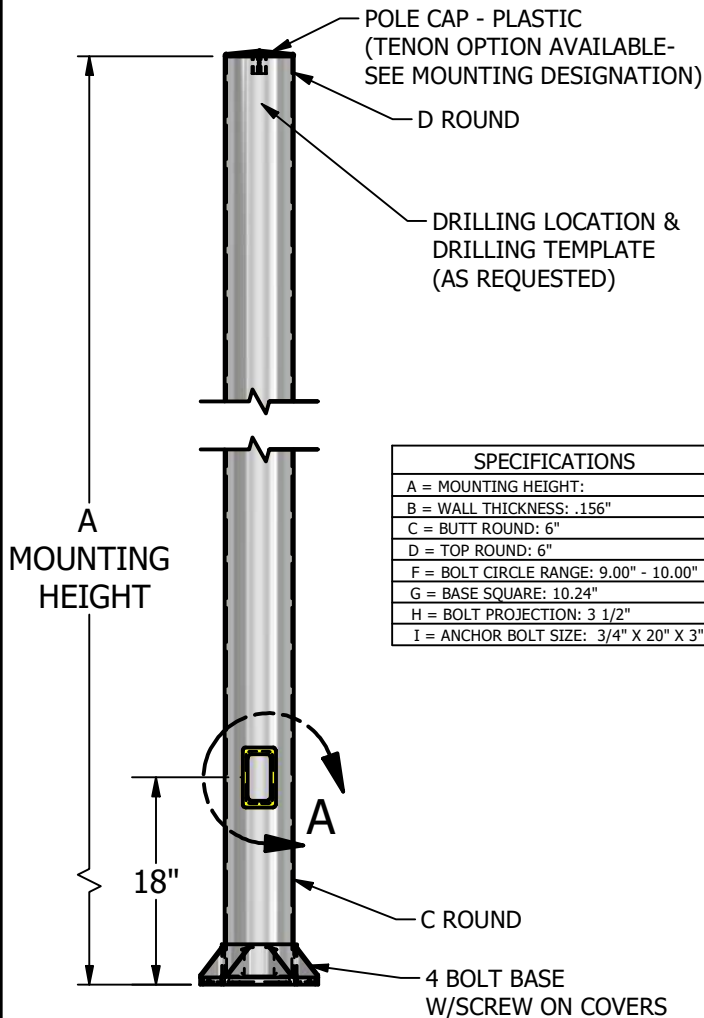


SPECIFICATIONS
A = MOUNTING HEIGHT:
B = WALL THICKNESS: .156"
C = BUTT ROUND: 6"
D = TOP ROUND: 6"
F = BOLT CIRCLE RANGE: 9.00" - 10.00"
G = BASE SQUARE: 10.24"
H = BOLT PROJECTION: 3 1/2"
I = ANCHOR BOLT SIZE: 3/4" X 20" X 3"

ANCHORAGE

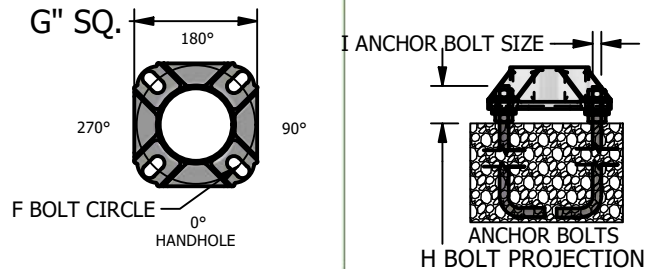

FIXTURE




BASE



4 BOLT ANCHOR BASE
WITH BOLT COVERS

HANDHOLE



2013 AASHTO MAXIMUM EPA RATINGS WITH 3 SEC. WIND GUST

ALUMINUM ROUND STRAIGHT POLE RSA 6 156 SERIES

PART NUMBER	MAX WT LBS	90 MPH SQ FT	100 MPH SQ FT	110 MPH SQ FT	120 MPH SQ FT	130 MPH SQ FT	140 MPH SQ FT	150 MPH SQ FT
RSA 6 156 8	350	44.80	35.80	29.90	25.00	21.20	18.20	15.80
RSA 6 156 10	260	34.70	28.20	23.10	19.30	16.50	14.10	12.20
RSA 6 156 12	260	28.20	22.90	18.80	15.60	13.20	11.30	9.80
RSA 6 156 14	200	23.40	18.80	15.40	13.70	11.80	9.20	8.00
RSA 6 156 16	200	19.50	15.60	13.80	10.60	8.80	7.60	6.50
RSA 6 156 18	150	16.20	12.80	10.60	8.60	7.30	6.20	5.30
RSA 6 156 20	150	13.50	10.50	8.60	7.00	5.70	4.80	4.20
RSA 6 156 24	150	9.20	7.10	5.60	4.50	3.70	3.00	2.50
RSA 6 156 25	150	8.50	6.50	5.10	4.00	3.30	2.70	2.20