



|              |  |  |             |       |
|--------------|--|--|-------------|-------|
| JOB NAME     |  |  | PART NO.    |       |
| DESCRIPTION: |  |  | DRAWING NO. |       |
| DRAWN BY:    |  |  | APPROVED:   | ECN:  |
|              |  |  | SCALE:      | DATE: |

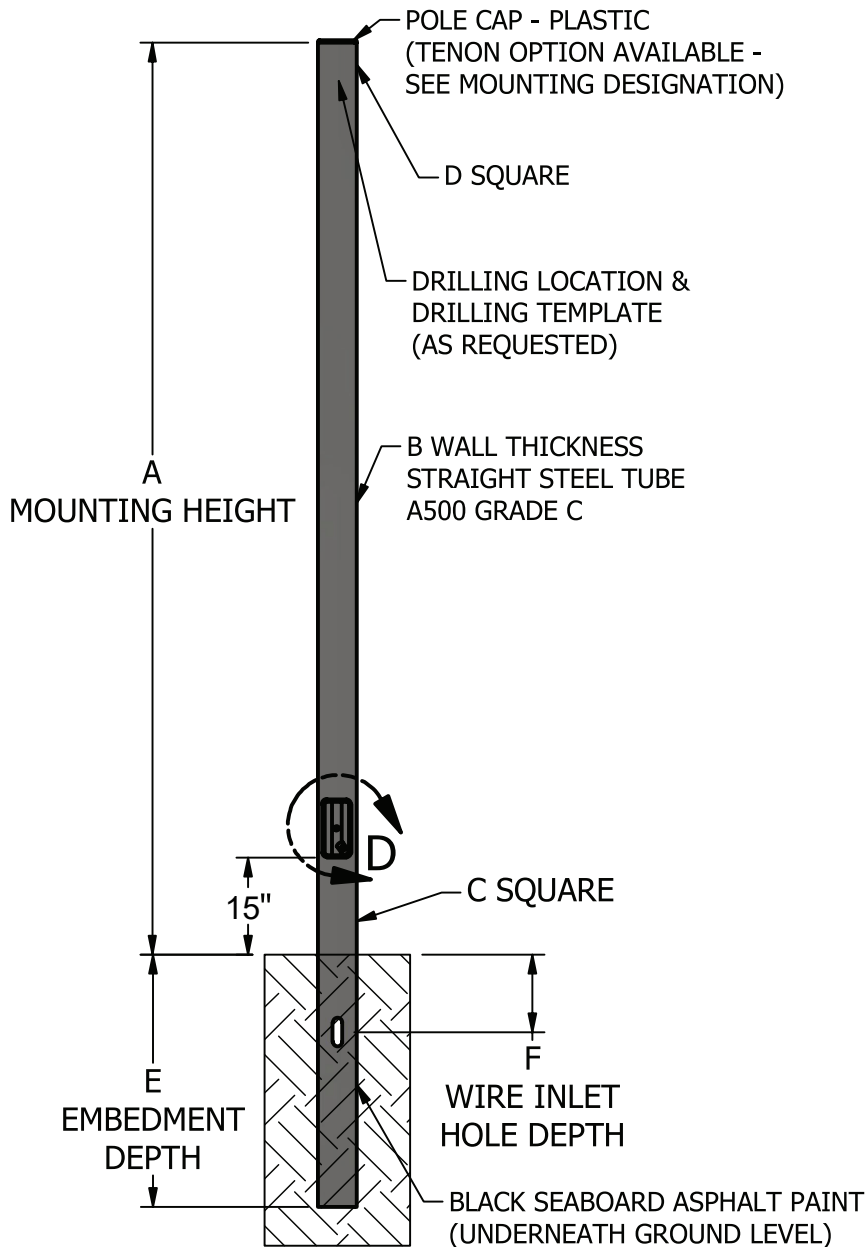


### SPECIFICATIONS

|                                         |
|-----------------------------------------|
| <b>A = MOUNTING HEIGHT:</b>             |
| <b>B = WALL THICKNESS: 11 GA.</b>       |
| <b>C = BUTT SQUARE: 5"</b>              |
| <b>D = TOP SQUARE 5"</b>                |
| <b>E = EMBEDMENT DEPTH: 2' +10%(A')</b> |
| <b>F = WIRE INLET HOLE DEPTH: E'/2</b>  |

#### FIXTURE



#### HANDHOLE



#### 2013 AASHTO MAXIMUM EPA RATINGS WITH 3 SEC. WIND GUST

#### DIRECT BURIAL STEEL SQUARE STRAIGHT POLE DBSSS 5 11 SERIES

| PART NUMBER   | 80 MPH SQ FT | 90 MPH SQ FT | 100 MPH SQ FT | 110 MPH SQ FT | 120 MPH SQ FT | 130 MPH SQ FT | 140 MPH SQ FT |
|---------------|--------------|--------------|---------------|---------------|---------------|---------------|---------------|
| DBSSS 5 11 20 | 21.22        | 15.48        | 11.38         | 8.34          | 6.03          | 4.23          | 1.65          |
| DBSSS 5 11 25 | 12.94        | 8.68         | 5.63          | 3.38          | 1.66          | 0.33          | NA            |
| DBSSS 5 11 30 | 7.52         | 4.03         | 1.54          | NA            | NA            | NA            | NA            |

\* = Requires different manufacturing process. Results in different pricing and lead time.