



|              |           |      |             |       |     |
|--------------|-----------|------|-------------|-------|-----|
| JOB NAME     |           |      | PART NO.    |       |     |
| DESCRIPTION: |           |      | DRAWING NO. |       | REV |
| DRAWN BY:    | APPROVED: | ECN: | SCALE:      | DATE: |     |

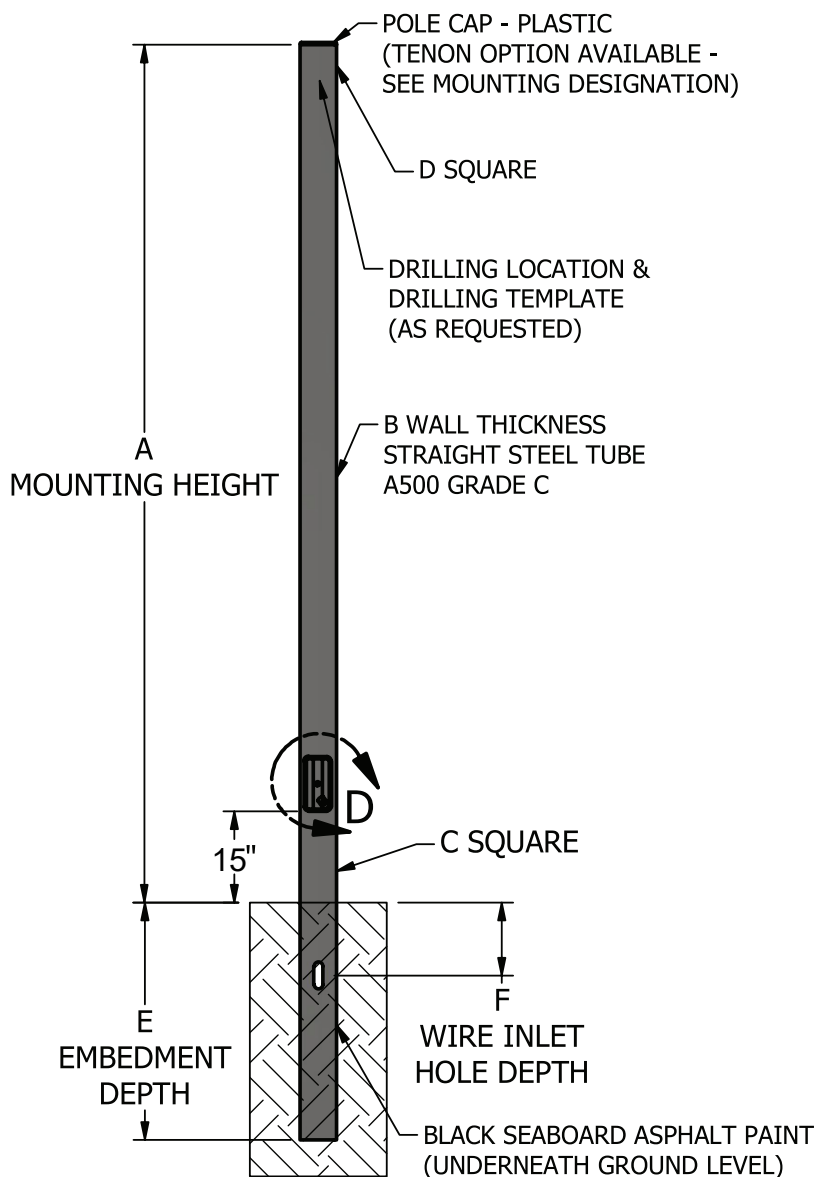


## SPECIFICATIONS

|                                         |
|-----------------------------------------|
| <b>A = MOUNTING HEIGHT:</b>             |
| <b>B = WALL THICKNESS: 7 GA.</b>        |
| <b>C = BUTT SQUARE: 6"</b>              |
| <b>D = TOP SQUARE 6"</b>                |
| <b>E = EMBEDMENT DEPTH: 2' +10%(A')</b> |
| <b>F = WIRE INLET HOLE DEPTH: E'/2</b>  |

## FIXTURE



## HANDHOLE



## 2013 AASHTO MAXIMUM EPA RATINGS WITH 3 SEC. WIND GUST

### DIRECT BURIAL STEEL SQUARE STRAIGHT POLE DBSSS 6 07 SERIES

| PART NUMBER   | MAX WT LBS | 90 MPH SQ FT | 100 MPH SQ FT | 110 MPH SQ FT | 120 MPH SQ FT | 130 MPH SQ FT | 140 MPH SQ FT | 150 MPH SQ FT |
|---------------|------------|--------------|---------------|---------------|---------------|---------------|---------------|---------------|
| DBSSS 6 07 20 | 200        | 43.77        | 34.05         | 26.86         | 21.39         | 17.13         | 13.75         | 11.03         |
| DBSSS 6 07 25 | 200        | 29.36        | 22.10         | 16.72         | 12.63         | 9.45          | 6.92          | 4.89          |
| DBSSS 6 07 30 | 200        | 20.57        | 14.58         | 10.14         | 6.77          | 4.14          | 2.06          | 0.38          |
| DBSSS 6 07 35 | 200        | 12.91        | 8.08          | 4.51          | 1.79          | N/A           | N/A           | N/A           |
| DBSSS 6 07 40 | 200        | 7.24         | 3.09          | 0.02          | N/A           | N/A           | N/A           | N/A           |