




JOB NAME			PART NO.		
DESCRIPTION:			DRAWING NO.		
DRAWN BY:		APPROVED:	ECN:	SCALE:	DATE:

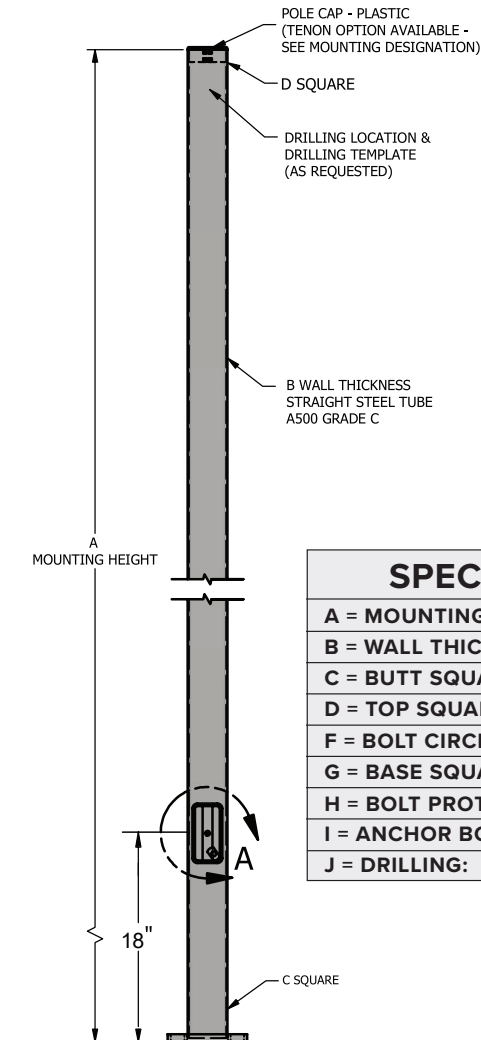


SPECIFICATIONS

A = MOUNTING HEIGHT:
B = WALL THICKNESS: 11 GA.
C = BUTT SQUARE: 4"
D = TOP SQUARE: 4"
F = BOLT CIRCLE RANGE: 8" - 9"
G = BASE SQUARE: 8"
H = BOLT PROTECTION: 3 1/2" ± 1/4"
I = ANCHOR BOLT SIZE: 3/4" X 20" X 3"
J = DRILLING:


ANCHORAGE




FIXTURE



BASE



HANDHOLE



2013 AASHTO MAXIMUM EPA RATINGS WITH 3 SEC. WIND GUST

STEEL SQUARE STRAIGHT POLE SSS 4 11 SERIES

PART NUMBER	MAX WT. (IBS.)	90 MPH (FT ²)	100 MPH (FT ²)	110 MPH (FT ²)	120 MPH (FT ²)	130 MPH (FT ²)	140 MPH (FT ²)	150 MPH (FT ²)
SSS 4 11 10	150	30.68	24.40	19.75	16.22	13.46	11.28	9.52
SSS 4 11 12	150	24.66	19.43	15.56	12.62	10.32	8.49	7.04
SSS 4 11 14	150	20.18	15.71	12.40	9.89	7.93	6.36	5.12
SSS 4 11 15	150	18.30	14.14	11.06	8.72	6.90	5.46	4.29
SSS 4 11 16	150	16.64	12.75	9.88	7.69	5.98	4.29	3.54
SSS 4 11 18	150	12.68	9.50	7.15	5.36	3.97	2.87	1.98
SSS 4 11 20	150	10.40	7.56	5.46	3.86	2.62	1.63	0.83
SSS 4 11 22	150	8.44	5.88	3.98	2.54	1.42	0.53	0.00
SSS 4 11 25	150	5.52	3.43	1.89	0.72	0.00	0.00	0.00