


UTILITY METALS

A DIVISION OF FABRICATED METALS LLC.


JOB NAME			PART NO.		
DESCRIPTION:			DRAWING NO.		REV
DRAWN BY:	APPROVED:	ECN:	SCALE:	DATE:	

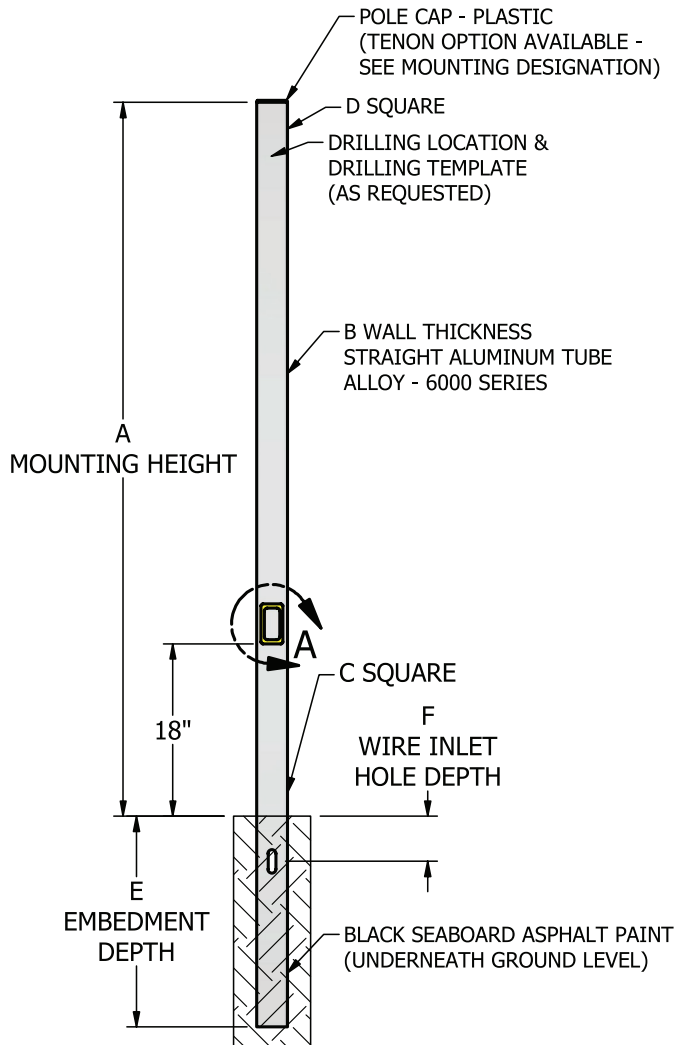


SPECIFICATIONS

A = MOUNTING HEIGHT:
B = WALL THICKNESS: .188
C = BUTT SQUARE: 4"
D = TOP SQUARE: 4"
E = EMBEDMENT DEPTH: 2' +10%(A')
F = WIRE INLET HOLE DEPTH: E'/2

FIXTURE



HANDHOLE



2013 AASHTO MAXIMUM EPA RATINGS WITH 3 SEC. WIND GUST

DIRECT BURIAL ALUMINUM SQUARE STRAIGHT POLE DBSSA 4 188 SERIES

PART NUMBER	MAX WT LBS	90 MPH SQ FT	100 MPH SQ FT	110 MPH SQ FT	120 MPH SQ FT	130 MPH SQ FT	140 MPH SQ FT	150 MPH SQ FT
DBSSA 4 188 8	350	32.60	25.80	21.20	17.60	14.80	12.60	10.80
DBSSA 4 188 10	260	25.70	20.50	16.50	13.50	11.20	9.40	7.80
DBSSA 4 188 12	260	20.70	16.20	13.00	10.60	8.60	7.10	5.80
DBSSA 4 188 14	200	17.00	13.10	10.40	8.30	6.60	5.30	4.30
DBSSA 4 188 16	200	16.00	10.70	8.30	6.40	5.00	3.80	2.90